


Datasheet

Single Conditioner



4545 BOYCE PARKWAY STOW, OHIO 44224
INFO@ANDERSONFEEDTECH.COM
☎ +1 216-641-1112
www.andersonfeedtech.com

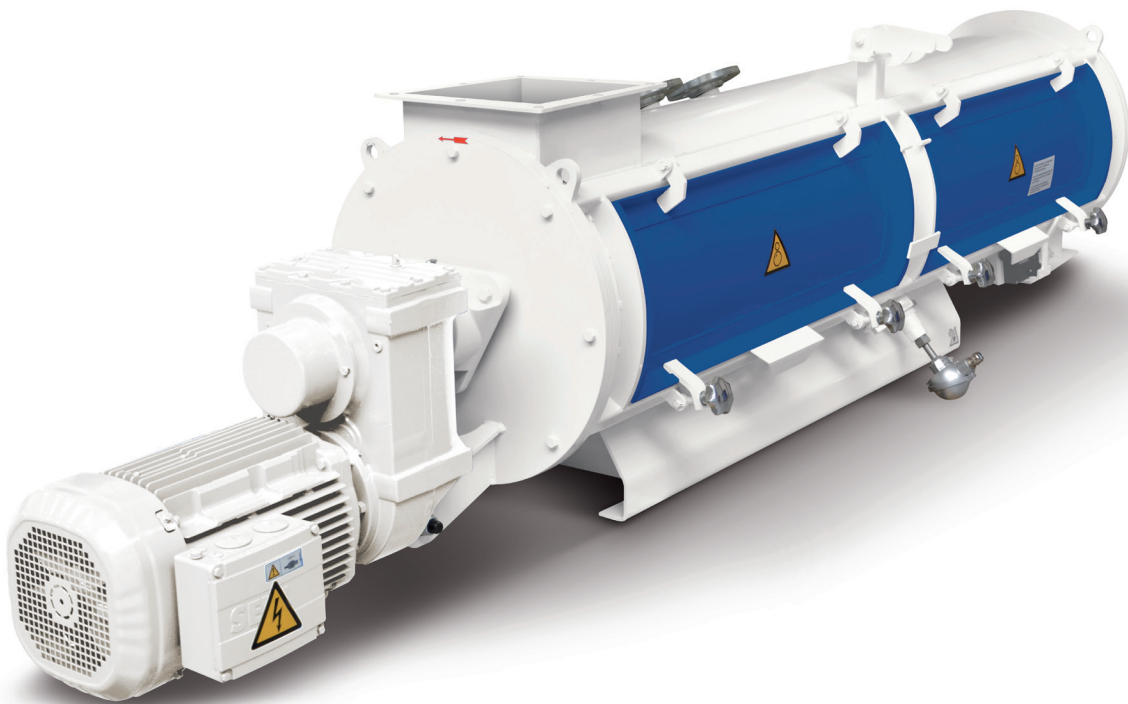

General


The details in the engineering and design make this conditioner stand out from the competition. Generously sized paddles that are adjustable in both pitch and height create a homogenous mixture for a hygienic process.

Advantages

- homogeneous mixing and hygienic process
- optimum absorption of steam and liquids
- robust housing construction
- easy to clean
- longer maintenance intervals
- simple design

Features

- mixer housing in AISI 304, base plate construction in heavy duty steel
- solid mixer shaft in AISI 304 with interchangeable paddles, adjustable in both height and pitch
- paddle holders in AISI 304, paddles in Hardox
- built-in scrapers at endplates
- stuffing box sealings on mixer shaft
- closed shaft bearings on spacers outside the housing
- suitable for frequency control. Frequency converter not included
- large inspection doors with safety switch
- temperature sensor PT100
- 1 steam inlet 3" and 2 liquid inlets 1½"
- electric heat tracing system, insulated with rock-wool (optional)

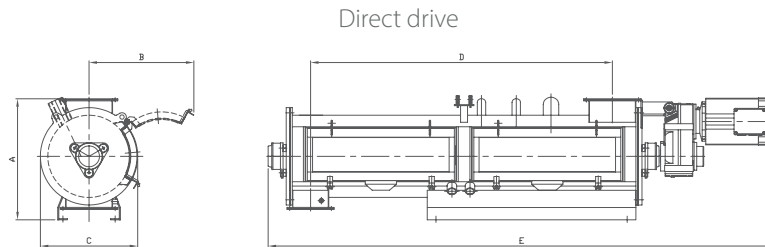

Type SINGLE	Capacity (t/h)	Dimensions (Inches)					Motorpower (Hp)
		A	B	C	D	E	
450 x 1700	12	27	24	22	57	104	13
450 x 2000	15	27	24	22	68	115	13
500 x 2500	20	28	25	24	86	141	20
500 x 3000	25	28	25	24	106	160	20
700 x 3000	30	40	35	35	105	164	25